


Waterproof RF 2-Button CCT LED Controller

- RF CCT LED controller with 2 channel constant voltage output.
- IP67 rating, internal gluing, suitable for outdoor and damp environment.
- 2-button operation, support on/off light, adjust brightness and color temperature, dynamic mode and dynamic speed.
- 4096 levels dimming smoothly without any flash.
- Match with RF 2.4G single or multi-zone CCT remote controller optional.

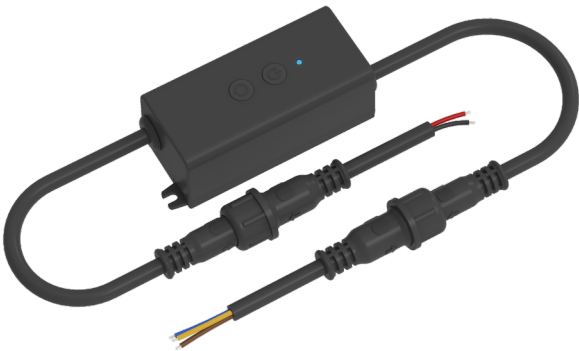


CE RoHS


Technical Parameters

Input and Output		Dimming data		Safety and EMC	
Input voltage	12-24VDC	Input signal	2-button + RF 2.4GHz	Safety standard	EN 61347-1/-2
Output voltage	12-24VDC	Control distance	30m(Barrier-free space)	EMC standard	EN IEC 55015/EN IEC 61547 ETSI EN 301 489-1/-3
Output current	2CH, 3A/CH	Dimming gray scale	4096 (2^12) levels	Radio Equipment	ETSI EN 300 440
Output power	72W@12V 144W@24V	Dimming range	1 -100%	Certification	CE RoHs
Output type	Constant Voltage	Dimming curve	Linear	<b>Environment</b>	
<b>Warranty and Protection</b>		PWM Frequency	2000Hz	Operation temperature	Ta: -20°C ~ +50°C
Warranty	5 years	<b>Package</b>		Case temperature (Max.)	Tc: +85°C
Protection	Reverse polarity	Size	L112xW80xH45mm	IP rating	IP67
		Gross weight	0.130kg		

Mechanical Structures and Installations

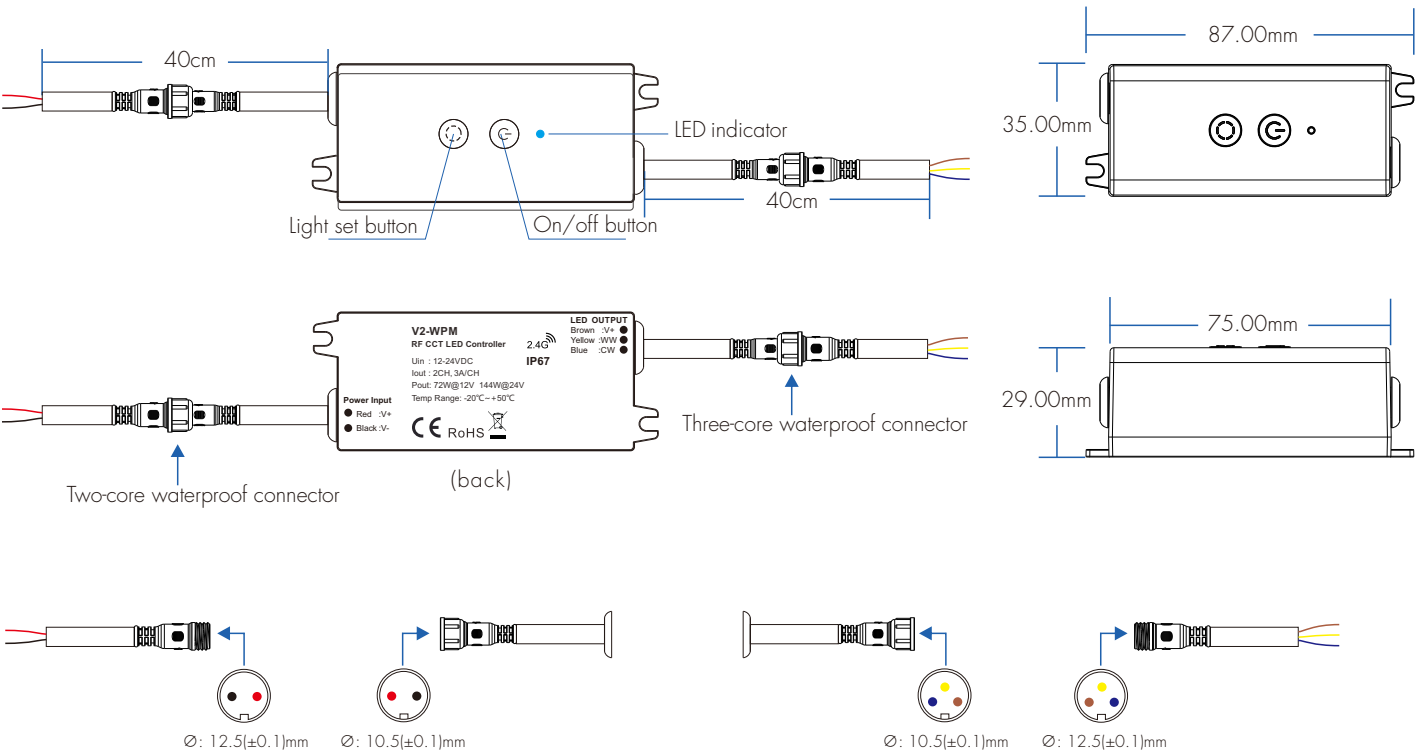

NOTE: When installing, align the insert and tighten the nut.

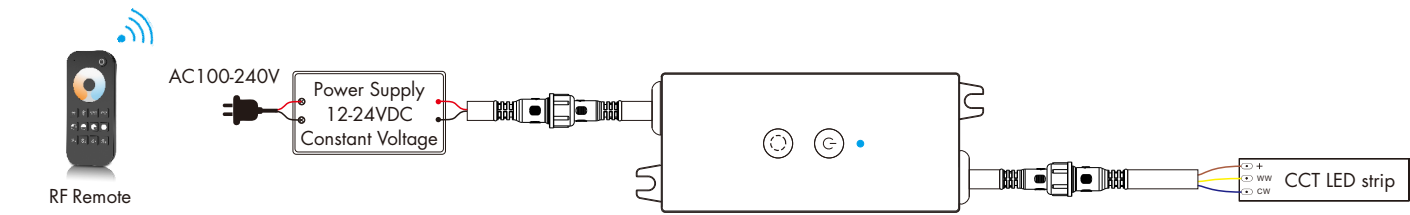

Button Function

- Short press:** Turn on/off the light.  
**Long press (1-6s):** Continuous brightness adjustment, dimming range 1-100%.
- Short press:** Enter static mode, and switch 5 levels color temperature, from warm white to cool white.  
**Double click:** Enter dynamic mode and switch 2 dynamic modes (color temperature fade, color temperature jump).  
Color temperature jump in the order of warm white - neutral white - cool white.  
**Long press:** In static mode, long press for 1-6s to adjust the color temperature,  
In dynamic mode, long press for 2s to sequentially switch 5 levels of dynamic change speed,  
and the LED indicator blinks 1 time for every level of switching.

Match With RF Remote Controller

There are two ways to match/delete:

Use Match key

Match:  
Press and hold and button 2s, the LED indicator blinks slowly, immediately press on/off key (single zone remote) or zone key (multiple zone remote) of the remote. The LED indicator stop blinks means match is successful.

Delete:  
Press and hold and button 5s, The LED indicator fast flash 5 times means all matched remotes were deleted.

Use Power Restart



Match:  
Switch off the power of the controller, then switch on power, repeat again. Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote. The light blinks 3 times means match is successful

Delete:  
Switch off the power of the controller, then switch on power, repeat again. Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote. The light blinks 5 times means all matched remotes were deleted..

Dual Color Control

WW =Warm white LED CW =Cool white LED Each channel can supply up to 72W(@ 24V) and white balance can be controlled as such:

Color temperature	Cool white	Neutral white	Warm white
Power distribution	WW=0W, CW=72W	WW=36W, CW=36W	WW=72W, CW=0W

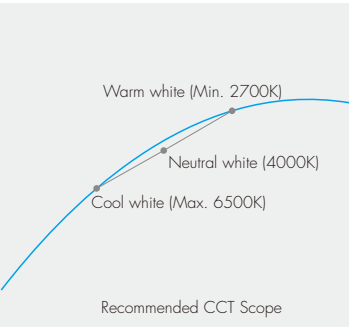

Safety Information

1. Do not install with electricity.
2. Please use it within the working temperature range of -20℃ ~+50℃ to ensure the stable performance of the product.
3. Avoid prolonged immersion in water.
4. Avoid using it in large metal areas or areas with strong electromagnetic waves, otherwise the remote control distance will be affected.