

3-Button RF LED Dimmer

- 1 channel constant voltage single color LED RF dimmer.
- 5A output, connect with 5 meters single color LED strip.
- 3 button operation with on/off and dimming.
- Match with 2.4G single zone or multiple zone single color remote control optional.
- \bullet 4096 levels 0-100% dimming smoothly without any flash.
- Available in white or black.




CE RoHS


Technical Parameters

Input and Output		Dimming data		Safety and EMC	
Input voltage	5-24VDC	Input signal	3 button + RF 2.4GHz	— FMC standard	EN IEC 55015/ EN IEC 61547
Output voltage	5-24VDC	Control distance	30m(Barrier-free space)		ETSI EN 301 489-1/-3
Output current	Max. 5A	Dimming gray scale	4096 (2^12) levels	Safety standard	EN 61347-1/-2
Output power	25W@5V	Dimming range	0-100%	Radio Equipment	ETSI EN 300 440
	60VV@12V 120VV@24V	Dimming curve	Logarithmic	Certification	CE RoHs
Environment		PWM Frequency	2KHz (default)	Package	
Operation temperature	Ta: -30°C ~ +50°C	Warranty	5 years	Size	L120 x W43 x H27mm
Case temperature (Max.)	Tc: +85°C	Protection	Over-heat, Short circuit	Gross weight	0.013kg

Dimension

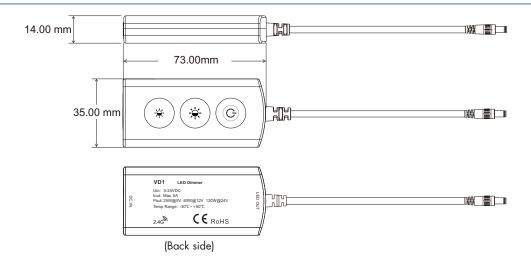

Wiring Diagram

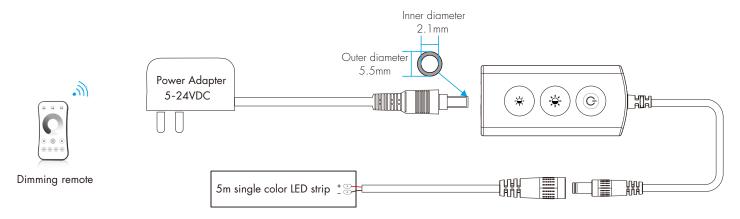

Note: Press and hold the (6) and (*) (Brightness-) button for 2s, output LED flashes 3 times, the light on/off fade time will change between 3s and 0.5s.

Button Function



: Turn on or off light.



: Brightness +, short press 10 levels, long press 1-6s for continuous 256 levels adjustment.



: Brightness -, short press 10 levels, long press 1-6s for continuous 256 levels adjustment.

Match Remote Control (optional)

End user can choose the suitable match/delete ways. Two options are offered for selection:

Use (*) and (*) button

Match:

Long press (*) and (*) button 2s, the output LED blinks 2 times, immediately press on/off key (single zone remote) or zone key (multiple zone remote) of the remote. The output LED blinks 3 times means match is successful.

Press and hold (*) and (*) button for 5s to delete all match, The output LED blinks 5 times means all matched remotes were deleted.


Use Power Restart

Match:

Switch off the power, then switch on power again, immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote. The output LED blinks 3 times means match is successful.

Switch off the power, then switch on power again, immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote. The output LED blinks 5 times means all matched remotes were deleted.

Dimming Curve



Packing List

White:



LED Dimmer 1 pcs



User Manual 1 pcs



DC Extension Cable (12cm) 1 pcs

Black:



LED Dimmer 1 pcs



User Manual 1 pcs



DC Extension Cable (12cm) 1 pcs